




DESIGN MEDLEY II TILE 988 MULTI-DIRECTIONAL

Design Medley II combines a mixture of textural overlaid framework grids that interweave and create gradual color changes across the pattern for unique and mergeable installations. Design Medley II features six unique multi-colorations inspired by nature's raw beauty, offering beautiful aesthetics that deliver versatility and functionality in order to adapt to today's design trends in commercial interior spaces.

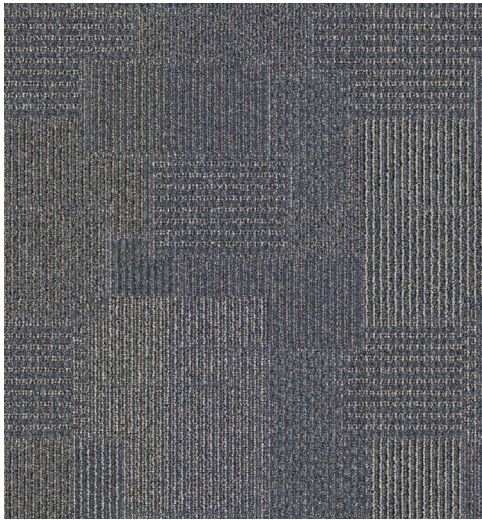

Assortment 556




Intermix 727




Mixture 848



Tempo 869

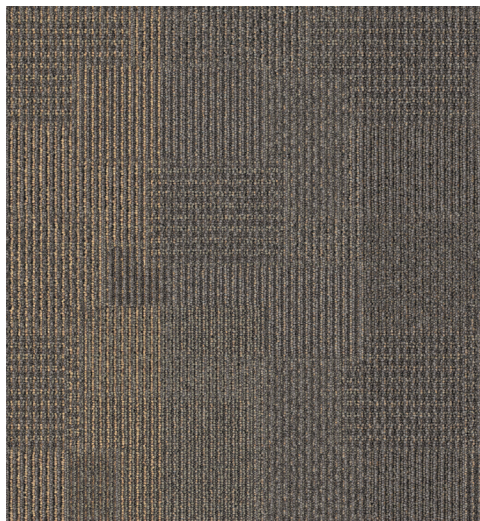


Rhythm 959

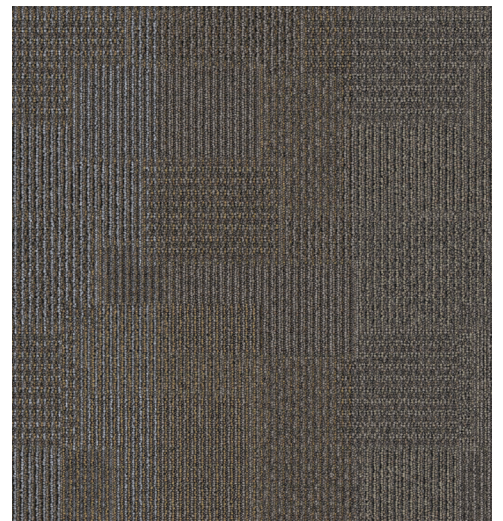

Variation 988

Replacing carpet tiles from different dye lots just got easier. With Mergeable Dye lot Carpet from Aladdin Commercial you can now confidently replace worn out carpet tiles without effecting the look of your spaces.

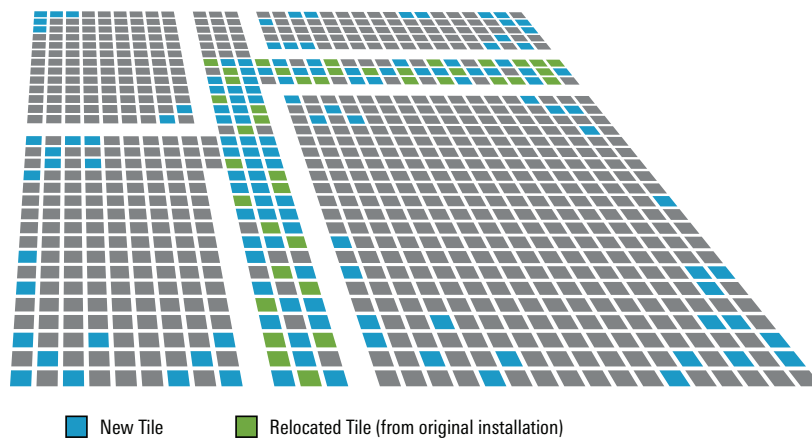

STEP 1

REMOVE WORN TILES

Take up and discard worn out/stained carpet tiles from original installation.

STEP 2

MIX NEW TILES FROM MULTIPLE DYELOTS AND/OR CARTONS

Dye lots will vary slightly so mix them.

STEP 3


BLEND IN OLD AND NEW TILES

Take some unworn tiles from other rooms in the installation, replace them with new tiles, then mix them with the mergeable dye lot tiles and replace the worn out tiles you removed.

DESIGN MEDLEY II/2B137

Style Name / Number	Design Medley II / 2B137
Construction	Tufted
Surface Appearance	Textured Patterned Loop
Gauge	1/12" (47.00 rows per 10 cm)
Pile Weight	22 oz/yd2 (746g/m2)
Dye Method	100% Solution Dyed
Fiber Type	Colorstrand® SD Nylon
Stain Release Technology	Mohawk Protection Plus Stain
Density	9,000
Soil Release Technology	Mohawk Protection Plus Soil
Primary Backing	Non-Woven Synthetic
Secondary Backing	UltraSet®
Recycled Content	Contains a minimum 39% pre-consumer recycled content by total product weight
Indoor Air Quality	Green Label Plus Certified # 1098
NSF 140	Gold
Size	24" x 24" (.6096 m x .6096 m)
Yds./Ctn	8
Installation Method	Monolithic / Vertica Ashlar / Brick Ashlar / Quarter Turn / Multi-Directional
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Country of Origin	Made in USA
Warranties	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants Warranty 10-Year Limited Stain Resistance Warranty

Installation Methods:



Up to 2,000 sq. yds. available within 10 business days or less

