



# The Roofing Collection Product Guide



Berkshire<sup>®</sup> Colonial<sup>†</sup>

## A BEAUTIFUL DECISION.

Choose beauty...and performance too.

Owens Corning® roofing shingles do more than just protect a structure from the elements. They boast a wide selection of color blends and styles that help bring out the true beauty in your home. Best of all, they work together with Owens Corning® Roofing Accessory Products to provide the durability of the Total Protection Roofing System\*^ — delivering great looks and protection that will last for many years to come.

With colors that range from subtle, natural hues to vibrant, eye-catching blends — and styles that include Specialty, Architectural and Traditional shingles — you're sure to find a shingle that suits you. No matter what your preference, the richly colored granules and elegant designs of Owens Corning® shingles will help bring your vision to life and add plenty of curb appeal to your home.

Choose your Owens Corning® roofing products with confidence. After all, we've been a recognized leader in the building materials industry for over 75 years. We're known for making homes more comfortable, beautiful and durable. And we can do the same for you.



TruDefinition® Duration®  
Designer Colors Collection Merlot†

Specialty



**BERKSHIRE®** COLLECTION Shingles 4



**WOODMOOR®** Shingles 5



**WOODCREST®** Shingles 6



TruDefinition®  
**WEATHERGUARD® HP** Shingles 7



SureNail® Technology



8



TruDefinition®  
**DURATION MAX®** Shingles  
with SureNail® Technology 9



**DURATION® PREMIUM COOL** Shingles  
with SureNail® Technology 10



TruDefinition®  
**DURATION® COOL** Shingles  
with SureNail® Technology 11



TruDefinition®  
**DURATION STORM®** Shingles  
with SureNail® and WeatherGuard® Technologies 12



TruDefinition®  
**DURATION® DESIGNER COLORS COLLECTION**  
Shingles with SureNail® Technology 13



TruDefinition®  
**DURATION®** Shingles  
with SureNail® Technology 14-15

Architectural



**DURATION® PREMIUM** Shingles  
with SureNail® Technology 16



TruDefinition®  
**OAKRIDGE®** Shingles 17



**OAKRIDGE®** Shingles 18-19

Traditional



**SUPREME®** Shingles 20-21



**TOTAL PROTECTION ROOFING SYSTEM.® ^**  
& Roofing Accessory Products

22-27



Canterbury Black<sup>†</sup>



Colonial<sup>†</sup>



Concord<sup>†</sup>



Manchester Grey<sup>†</sup>



Sherwood Beige<sup>†</sup>



Sherwood Beige<sup>†</sup>

Discover the difference that **Berkshire® Collection Shingles** can make. With a thickness, proportion and color selection reminiscent of natural slate, these shingles make a unique statement. And the Berkshire® Collection proves it's as solid as it looks with a Limited Lifetime Warranty<sup>\*\*/\*\*</sup> (for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty<sup>\*</sup> and Algae Resistance Limited Warranty<sup>\*</sup>. Berkshire® Collection Shingles are produced with StreakGuard™ Protection to inhibit the growth of airborne blue-green algae<sup>\*</sup> that can cause unsightly dark streaks on your roof. Owens Corning provides a 15-year Algae Resistance Limited Warranty<sup>\*</sup>.

**Product Attributes**

**Warranty Length\***

Limited Lifetime<sup>\*\*</sup> (for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH

**Algae Resistance Limited Warranty\***

15 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**Berkshire® Shingles Product Specifications**

Nominal Size	18 3/4" x 38"
Nominal Weight	360 lbs.
Exposure	8 3/8"
Shingles per Square	45
Bundles per Square	5 bundles of 9 shingles
Coverage per Square	99.5 sq. ft.


**Berkshire® Hip & Ridge Product Specifications**

Nominal Size	12" x 12"
Exposure	8"
Pieces per Carton	30
Lineal Feet per Carton	20

**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- CSA A123.5<sup>##</sup>
- Florida Product Approval
- ICC-ES AC438<sup>#</sup>
- Miami-Dade County Product Approval<sup>§</sup>
- UL ER2453-01<sup>##</sup>
- UL ER2453-02<sup>##</sup>

Colors available in all Service Areas.

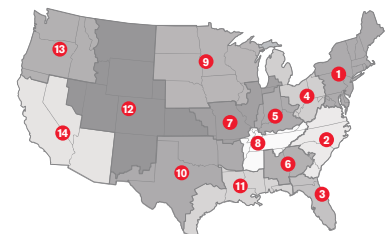

† Only on product sold in Canada.

§ Applies for all areas that recognize Miami-Dade Product Control Section.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.



Chestnut<sup>+</sup>


Bold, rustic **Woodmoor® Shingles** are designed to transform your home with the extra-thick dimension and rich texture reminiscent of wood shake but with greater durability and less maintenance. They also offer peace of mind by meeting the highest fire-resistance standards in the industry. Best of all, Woodmoor® Shingles come with a Limited Lifetime Warranty<sup>\*/\*\*</sup> (for as long as you own your home), a 110/130-MPH<sup>††</sup> Wind Resistance Limited Warranty<sup>\*</sup> and Algae Resistance Limited Warranty<sup>\*</sup>. Woodmoor® Shingles are produced with StreakGuard™ Protection to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty<sup>\*</sup>. In addition, the Woodmoor® offering includes Cool Roof Collection colors that are specifically designed with solar-reflecting granules to meet prescriptive Cool Roof requirements.



Carbon<sup>+</sup>



Chestnut<sup>+</sup>

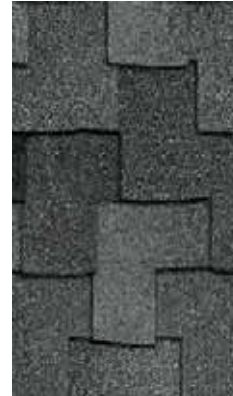

Granite<sup>+</sup>



Mesquite<sup>+</sup>



Sycamore<sup>+</sup>



Timber<sup>+</sup>



Sand Castle<sup>+</sup>  
Not available in Service Areas 7, 10, 12, 13.



Summerwood<sup>+</sup>  
Not available in Service Areas 7, 10, 12, 13.

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

110/130 MPH<sup>††</sup>

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**Woodmoor® Shingles Product Specifications**

Nominal Size	14 1/4" x 40"
Nominal Weight	465 lbs.
Exposure	4"
Shingles per Bundle	15
Bundles per Square	6
Coverage per Square	100 sq. ft.


**WoodStart® Starter Shingles Product Specifications**

Nominal Size	40" x 13 3/8"
Pieces per Bundle	16
Lineal Feet per Bundle	53.33

**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- CSA A123.5<sup>††</sup>
- ICC-ES AC438\*
- UL ER2453-01\*\*
- UL ER2453-02\*\*

Colors available in Service Areas 7, 10, 12, 13, 14.

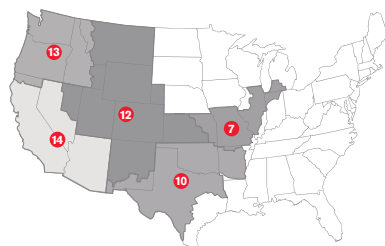

†† 130 MPH is applicable only with Owens Corning® Starter Shingle product application along eaves and rakes in accordance with installation instructions. Refer to installation instructions for complete details.

\*\* Only on product sold in Canada.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

Cool Roof Collection shingles meet California prescriptive Cool Roof requirements.



Thick, ruggedly beautiful **Woodcrest® Shingles** are designed to enhance your home with the natural appearance and texture of wood shake but with greater durability and less maintenance. They also offer peace of mind by meeting the highest fire resistance standards in the industry. Best of all, Woodcrest® Shingles come with a Limited Lifetime Warranty\*\*\* (for as long as you own your home), a 110/130-MPH\*\* Wind Resistance Limited Warranty\* and Algae Resistance Limited Warranty.\* Woodcrest® Shingles are produced with StreakGuard™ Protection to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty.\* In addition, the Woodcrest® offering includes Cool Roof Collection colors that are specifically designed with solar-reflecting granules to meet prescriptive Cool Roof requirements.

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

110/130 MPH\*\*

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**Woodcrest® Shingles Product Specifications**

Nominal Size	14 1/4" x 40"
Nominal Weight	350 lbs.
Exposure	4"
Shingles per Bundle	15
Bundles per Square	6
Coverage per Square	100 sq. ft.

**WoodStart® Starter Shingles Product Specifications**

Nominal Size	40" x 13 3/8"
Pieces per Bundle	16
Lineal Feet per Bundle	53.33

**Applicable Standards and Codes**


ASTM D228
ASTM D3018 (Type 1)
ASTM D3161 (Class F Wind Resistance)
ASTM D3462
ASTM D7158 (Class H Wind Resistance)
ASTM E108/UL 790 (Class A Fire Resistance)
CSA A123.5**
ICC-ES AC438*
UL ER2453-01**
UL ER2453-02**



Carbon+



Chestnut+

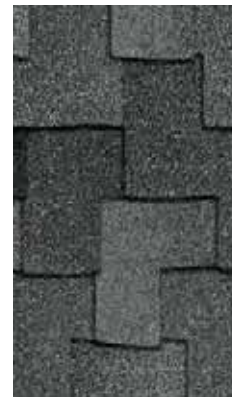

Granite+



Mesquite+



Sycamore+



Timber+




Sand Castle+  
Not available in Service Areas 7, 9, 10, 12, 13



Summerwood+  
Not available in Service Areas 7, 9, 10, 12, 13

Colors available in Service Areas 7, 9, 10, 12, 13, 14.

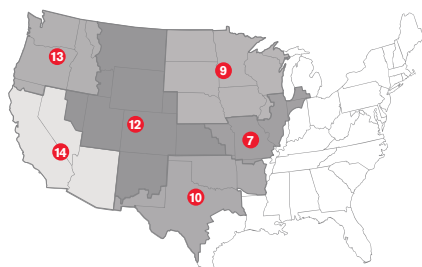

\*\* 130 MPH is applicable only with Owens Corning® Starter Shingle product application along eaves and rakes in accordance with installation instructions. Refer to installation instructions for complete details.

\*\* Only on product sold in Canada.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

 Cool Roof Collection shingles meet California prescriptive Cool Roof requirements.



Antique Silver†



Brownwood†




Desert Tan†



Driftwood†



Estate Gray†

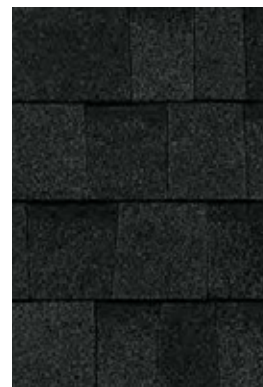

Onyx Black†



Teak†

**TruDefinition® WeatherGuard® HP Impact-Resistant Shingles** are an excellent choice for homeowners concerned with the effect of severe weather on their roof. Unlike standard shingles, TruDefinition® WeatherGuard® HP Shingles are engineered with an integrated polymeric backing material that allows the shingle to meet one of the industry's highest ratings for impact resistance. In addition, they are constructed with multiple granule colors and shadowing for a unique and dramatic effect. They can also help save on deductible costs and may help homeowners qualify for insurance premium discounts.<sup>††</sup> TruDefinition® WeatherGuard® HP Shingles are produced with StreakGuard™ Protection to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty\*.

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

110/130 MPH†

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**TruDefinition® WeatherGuard® HP Shingles Product Specifications**

Nominal Size	13 1/4" x 39 3/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.


**WeatherGuard® HP Hip & Ridge Shingles Product Specifications**

Nominal Size	12" x 36"
Piece Size	12" x 12"
Exposure	6"
Shingles per Bundle	22
Pieces per Shingle/Bundle	3/66
Lineal Coverage per Bundle	33 ft.

**Applicable Standards and Codes**

ASTM D228
ASTM D3018 (Type 1)
ASTM D3161 (Class F Wind Resistance)
ASTM D3462
ASTM D7158 (Class H Wind Resistance) <sup>§</sup>
ASTM E108/UL 790 (Class A Fire Resistance)
Florida Product Approval
ICC-ES AC438 <sup>#</sup>
UL 2218 (Class 4 Impact Resistance) <sup>1</sup>
UL ER2453-01 <sup>##</sup>
UL ER2453-02 <sup>##</sup>

Colors available in Service Areas 8, 10, 11.



†† Homeowners should check with their insurance company to see if they qualify.  
 ‡ 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application. To maintain the 130-MPH Wind Resistance Limited Warranty, each WeatherGuard® HP Hip & Ridge Shingle must be hand-sealed. Failure to hand-seal WeatherGuard® HP Hip & Ridge Shingles will reduce wind warranty to 110 MPH. Refer to installation instructions for complete details.  
 § Not applicable for WeatherGuard® HP Hip & Ridge Shingles.  
 1 WeatherGuard® HP Hip & Ridge Shingles are required to complete UL 2218 Class 4 Impact-Resistant Roof System.  
 WeatherGuard® Technology U.S. Patent 6,228,785.  
 # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.  
 ## Underwriters Laboratories Evaluation Service Evaluation Report.





# THE SURENAIL® DIFFERENCE— A technological breakthrough in roofing.

The innovative features of Owens Corning® Duration® Series Shingles with patented SureNail® Technology offer the following:


**Breakthrough Design.** Featuring a tough, woven engineered reinforcing fabric to deliver consistent fastening during installation.

**Triple Layer Protection.\*** A unique “triple layer” of reinforcement occurs when the fabric overlays the common bond of the shingle laminate layers that offers excellent fastener holding power.

**Outstanding Grip.** Our enhanced Tru-Bond®† sealant grips tightly to the engineered fabric nailing strip on the shingle below.

**Excellent Adhesive Power.** Specially formulated, wide adhesive bands help keep shingle layers laminated together.

**Exceptional Wind Resistance.** Engineered to deliver 130-MPH\* wind warranty performance with only 4 nails. Fewer nails required can mean fewer deck penetrations.

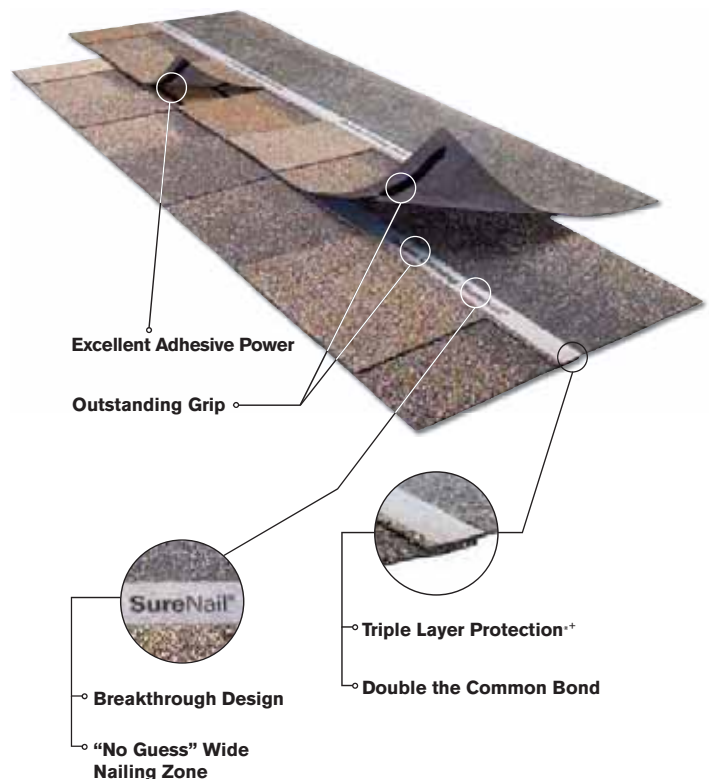

+ The amount of Triple Layer Protection\* may vary on a shingle-to-shingle basis.

† Tru-Bond® is a proprietary premium weathering-grade asphalt sealant that is blended by Owens Corning. SureNail® Technology is proprietary with U.S. and foreign protection including U.S. Patent Nos. 6,471,812; 7,836,654; 8,156,704; 8,181,413; 8,240,102; 8,430,983; 8,607,521; 8,623,164; 8,752,351; 8,991,130; 9,121,178; and other patents pending.

SureNail® Technology is not a guarantee of performance in all weather conditions. SureNail® Technology is available only on Owens Corning® Duration® Series Shingles.



**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**TruDefinition® Duration MAX® Shingles Product Specifications**

Nominal Size	13 1/4" x 39 3/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	4
Coverage per Square	98.4 sq. ft.

**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- CSA A123.5+
- ICC-ES AC438#
- UL ER2453-01###
- UL ER2453-02###


**DecoRidge® Hip & Ridge Shingles Product Specifications**

	<b>8"</b>	<b>10"</b>
Exposure	8"	8"
Pieces per Carton	30	30
Lineal Feet per Carton	20 ft.	20 ft.

**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM E108/UL 790 (Class A Fire Resistance)

Colors available in Service Areas 13, 14.

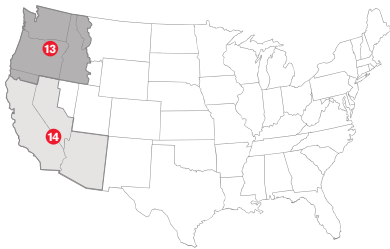

Smokey Mountain†

**TruDefinition® Duration MAX® Shingles** combine the bold, thick appearance of a wood shingle with the strength and durability of patented SureNail® Technology to deliver both dramatic beauty and peak performance. They offer a Limited Lifetime Warranty\*\*\* (for as long as you own your home) and a 130-MPH Wind Resistance Limited Warranty\*. In a premium offering of TruDefinition® Duration MAX® shingles, there are COOL Roof Collection colors that are specially designed to reflect the sun's rays, helping to make your home more comfortable and energy efficient.



Carbon†



Granite†




Mesquite†



Smokey Mountain†



Sycamore†



Sand Castle†  
Not available in Service Area 13.



Summerwood†  
Not available in Service Area 13.



Granite†

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.  
## Underwriters Laboratories Evaluation Service Evaluation Report.  
+ Only on product sold in Canada.  
Cool Roof Collection shingles meet California prescriptive Cool Roof requirements.





**Duration® Premium Cool Shingles with patented SureNail® Technology** feature granules that reflect solar energy, which helps keep roofs cooler and may result in lower energy consumption and extended roof life. These shingles are ENERGY STAR® qualified and rated by the Cool Roof Rating Council (CRRC). In addition, Duration® Premium Cool Shingles feature a Limited Lifetime Warranty\* (\*\* for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty\* and an Algae Resistance Limited Warranty\*. Duration® Premium Cool Shingles are produced with StreakGuard™ Protection to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty\*.



Similar to the energy-efficient appliances in your home, roofing products can help provide energy-saving qualities. Owens Corning® ENERGY STAR® qualified shingles can help reduce your heating and cooling bills when installed properly. These shingles reflect solar energy, helping to decrease the amount of heat transferred to a home's interior — and the amount of air conditioning needed to keep it comfortable. Actual savings will vary based on geographic location and individual building characteristics.



Frosted Oak†




Harbor Fog†



Sage†



Sunrise†

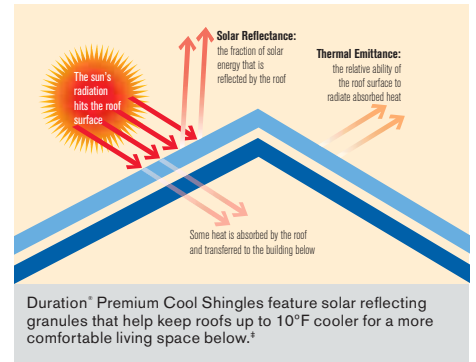

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years


**Duration® Premium Cool Shingles Product Specifications**

Nominal Size	13¼" x 39⅝"
Exposure	5⅞"
Shingles per Square	64
Bundles per Square	4
Coverage per Square	98.4 sq. ft.

**Applicable Standards and Codes**

- ASTM D228
  - ASTM D3018 (Type 1)
  - ASTM D3161 (Class F Wind Resistance)
  - ASTM D3462
  - ASTM D7158 (Class H Wind Resistance)
  - ASTM E108/UL 790 (Class A Fire Resistance)
  - Florida Product Approval
  - ICC-ES AC438\*
  - UL ER2453-01\*\*
  - UL ER2453-02\*\*
- ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

Colors available in all Service Areas.

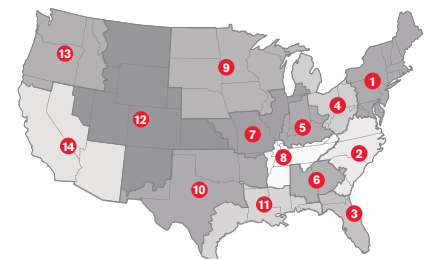

† Estimated roof surface temperature reduction based on 1998 NIST study, *Analytical Study of Residential Buildings with Reflective Roofs*. A temperature reduction is representative of a change from a typical roof to a Cool Roof (solar reflectance 15 to 25) in most climates.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

\*\* Underwriters Laboratories Evaluation Service Report.

COOL ROOF COLLECTION Cool Roof Collection shingles meet California prescriptive Cool Roof requirements.





Mountainside<sup>†</sup>

**TruDefinition® Duration® COOL Shingles with patented SureNail® Technology** feature granules that reflect solar energy and have color depth like no other. The solar reflection helps keep roofs cooler and may result in lower energy consumption and extended roof life. These shingles are rated by the Cool Roof Rating Council (CRRC). In addition, TruDefinition® Duration® COOL Shingles feature a Limited Lifetime Warranty<sup>\*/\*\*</sup> (for as long as you own your home) and a 130-MPH Wind Resistance Limited Warranty\*.

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**TruDefinition® Duration® COOL Shingles Product Specifications**


Nominal Size	13 1/4" x 39 3/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.


**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- ICC-ES AC438<sup>#</sup>
- UL ER2453-01<sup>\*\*</sup>
- UL ER2453-02<sup>\*\*</sup>

Shasta White color meets ENERGY STAR<sup>®</sup> requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

Colors available only in Service Area 14.

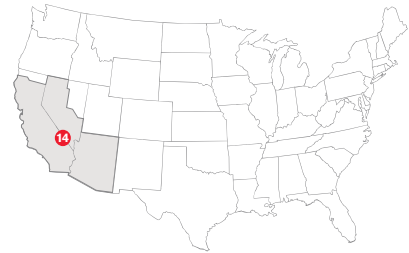

- # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.
- ## Underwriters Laboratories Evaluation Service Evaluation Report.
-  Cool Roof Collection shingles meet California prescriptive Cool Roof requirements.



Amber<sup>†</sup>




Forest Brown<sup>†</sup>



Mojave<sup>†</sup>



Mountainside<sup>†</sup>

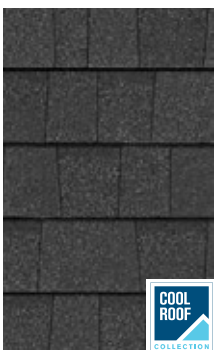


Night Sky<sup>†</sup>



Oyster Shell<sup>†</sup>



Sand Castle<sup>†</sup>

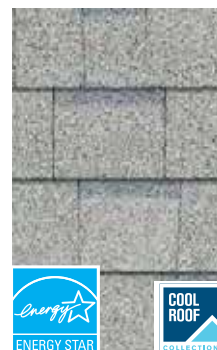

Shasta White<sup>†</sup>



Sierra Gray<sup>†</sup>



Summerwood<sup>†</sup>





**TruDefinition® Duration STORM® Impact-Resistant Shingles** with patented WeatherGuard® Technology are the ideal premium shingle choice for homeowners concerned with the effect of severe weather on their roof. In fact, homeowners may qualify for insurance premium discounts\*.

TruDefinition® Duration STORM® Shingles feature SureNail® Technology with Triple Layer Protection® and an integrated polymeric backing material that allows them to meet one of the industry's highest ratings for impact resistance. This shingle and corresponding ProEdge STORM® Impact-Resistant Hip & Ridge Shingles<sup>§</sup> are designed for outstanding holding power against the high winds of severe storms — up to 130 MPH\*\*/†† TruDefinition® Duration STORM® Shingles are produced with StreakGuard™ Protection to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty\*.



Antique Silver†



Brownwood†



Desert Tan†



Driftwood†



Estate Gray†



Onyx Black†



Teak†

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH††

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**TruDefinition® Duration STORM® Shingles Product Specifications**

Nominal Size	13 1/4" x 39 5/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.


**ProEdge STORM® Hip & Ridge Shingles Product Specifications**

Nominal Size	12" x 36"
Piece Size	12" x 12"
Exposure	6"
Shingles per Bundle	22
Pieces per Shingle/Bundle	3/66
Lineal Coverage per Bundle	33 ft.

**Applicable Standards and Codes**

ASTM D228
ASTM D3018 (Type 1)
ASTM D3161 (Class F Wind Resistance)
ASTM D3462
ASTM D7158 (Class H Wind Resistance) <sup>1</sup>
ASTM E108/UL 790 (Class A Fire Resistance)
CSA A123.5 <sup>2</sup>
ICC-ES AC438 <sup>#</sup>
UL 2218 (Class 4 Impact Resistance) <sup>§</sup>
UL ER2453-01**
UL ER2453-02**

Colors available in Service Areas 4, 5, 7, 9, 12.



\* Homeowners should check with their insurance company to see if they qualify.

†† To maintain the 130-MPH Wind Resistance Limited Warranty, each ProEdge STORM® Hip & Ridge Shingle must be hand-sealed. Failure to hand seal will reduce wind warranty to 110 MPH for the ProEdge STORM® Hip & Ridge Shingle. Refer to the installation instructions for complete details.

§ ProEdge STORM® Hip & Ridge Shingles are required to complete UL 2218 Class IV Impact-Resistant Roof System.

1 Not applicable for ProEdge STORM® Hip & Ridge Shingles.

2 Only on product sold in Canada.

WeatherGuard® Technology U.S. Patent 6,228,785.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

\*\* Underwriters Laboratories Evaluation Service Evaluation Report.





After with Storm Cloud†

Before


Bright. Bold. Brilliant. The world is full of color. From the cars we drive to the appliances we buy, we have the power to choose the colors we surround ourselves with. If you're looking to make a truly vibrant impact, don't overlook the power of using color on the roof to help coordinate exterior accents like paint, trim and even landscaping. **TruDefinition® Duration® Designer Colors Collection Shingles** can bring it all together — helping to improve your structure's aesthetics and perceived value — with remarkable vibrancy and colors you won't find anywhere else. TruDefinition® Duration® Designer Colors Collection Shingles are produced with StreakGuard™ Protection<sup>1</sup> to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty\*.

TruDefinition® Duration® Designer Colors Collection Shingles feature the high-performance and durability of patented SureNail® Technology with Triple Layer Protection® and excellent adhesive power. Plus, they boast a Limited Lifetime Warranty\*<sup>\*\*\*</sup> (for as long as you own your home) and can stand up to 130-MPH\* winds.

Whether you're looking to add more drama or a knockout new look, you'll be amazed at the difference that TruDefinition® Duration® Designer Colors Collection Shingles can make — they offer brilliant impact and curb appeal like you never imagined. And when exterior elements work in harmony, the look will be vibrant, cohesive and undeniably spectacular.

**Owens Corning® Hip & Ridge Shingles**

Hip & Ridge Shingles are uniquely color matched to the TruDefinition® Duration® Designer Colors Collection Shingles. The multiple color blends are only available from Owens Corning Roofing and offer a finished look for the roof.

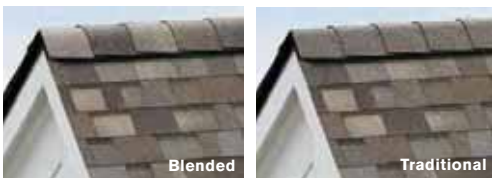

Blended

Traditional

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)



Algae resistance available in areas shown in white.

**Wind Resistance Limited Warranty\***

130 MPH

**Algae Resistance Limited Warranty\***

10 Years


**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**TruDefinition® Duration® Designer Colors Collection Shingles Product Specifications**

Nominal Size	13 1/4" x 39 5/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.

Colors Available in all Service Areas

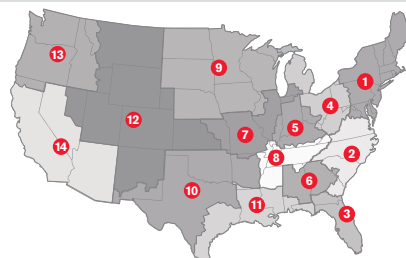


Aged Copper†



Merlot†



Pacific Wave†



Sand Dune†



Sedona Canyon†



Storm Cloud†



Summer Harvest†

- † Applies for all areas that recognize Miami-Dade Product Control Section.
- # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.
- ## Underwriters Laboratories Evaluation Service Evaluation Report.
- 1 StreakGuard™ Algae Resistance Technology is not available in the Compton and Denver (12 and 14) service areas.

**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- Florida Product Approval
- ICC-ES AC438#
- Miami-Dade County Product Approval#
- UL ER2453-01##
- UL ER2453-02##





**TruDefinition® Duration® Shingles** with patented SureNail® Technology are specially formulated to provide great contrast and dimension to any roof. Through the use of multiple granule colors and shadowing, they deliver an exclusive combination of color and depth that makes them like no other. TruDefinition® Duration® Shingles are available in popular colors and feature a Limited Lifetime Warranty\*\*\* (for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty\* and Algae Resistance Limited Warranty\* available on a regional basis. TruDefinition® Duration® Shingles are produced with StreakGuard™ Protection¹ to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty\*.

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\*  
(for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**TruDefinition® Duration® Shingles**

**Product Specifications**

Nominal Size	13 1/4" x 39 3/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.




Algae resistance available in areas shown in white.

**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- Florida Product Approval
- ICC-ES AC438#
- Miami-Dade County Product Approval†
- UL ER2453-01\*\*
- UL ER2453-02\*\*

Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

Color availability varies by Service Area.

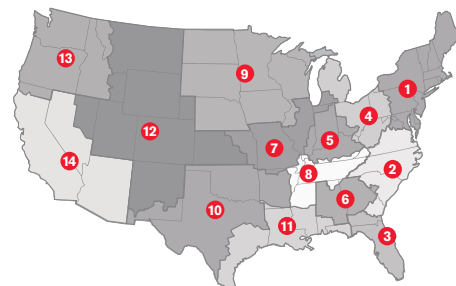

† Applies for all areas that recognize Miami-Dade Product Control Section.  
 # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.  
 ## Underwriters Laboratories Evaluation Service Evaluation Report.  
 1 StreakGuard™ Algae Resistance Technology is not available in the Compton and Denver (12 and 14) service areas.



TruDefinition® Duration® National Colors



Brownwood†



Chateau Green†



Desert Tan†




Driftwood†



Estate Gray†



Harbor Blue†

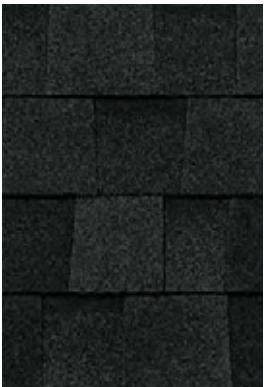

Onyx Black†

TruDefinition® Duration® Regional Colors (See Map)



Amber†  
Not available in Service Areas  
2, 6, 8, 13, 14.




Antique Silver†  
Not available in Service Areas  
1, 2, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14.



Colonial Slate†  
Not available in Service Areas  
2, 3, 6, 8, 12, 13, 14.



Quarry Gray†  
Not available in Service Areas  
8, 10, 11.

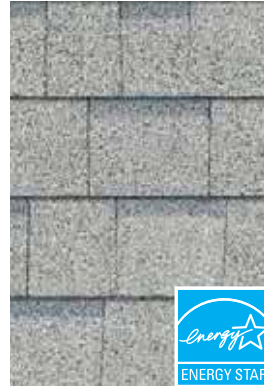

Shasta White†  
Not available in Service Areas  
8, 14.



Sierra Gray†  
Not available in Service Areas  
2, 3, 6, 8, 14.



Slatestone Gray†  
Not available in Service Areas  
3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14.



Teak†  
Not available in Service Area 3.



Terra Cotta†  
Not available in Service Area 13.



Williamsburg Gray†  
Not available in Service Areas  
1, 3, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14.



**Brownwood†**  
Not available in Service Area 14.



**Desert Tan†**  
Not available in Service Area 14.



**Driftwood†**




**Estate Gray†**



**Onyx Black†**



**Teak†**

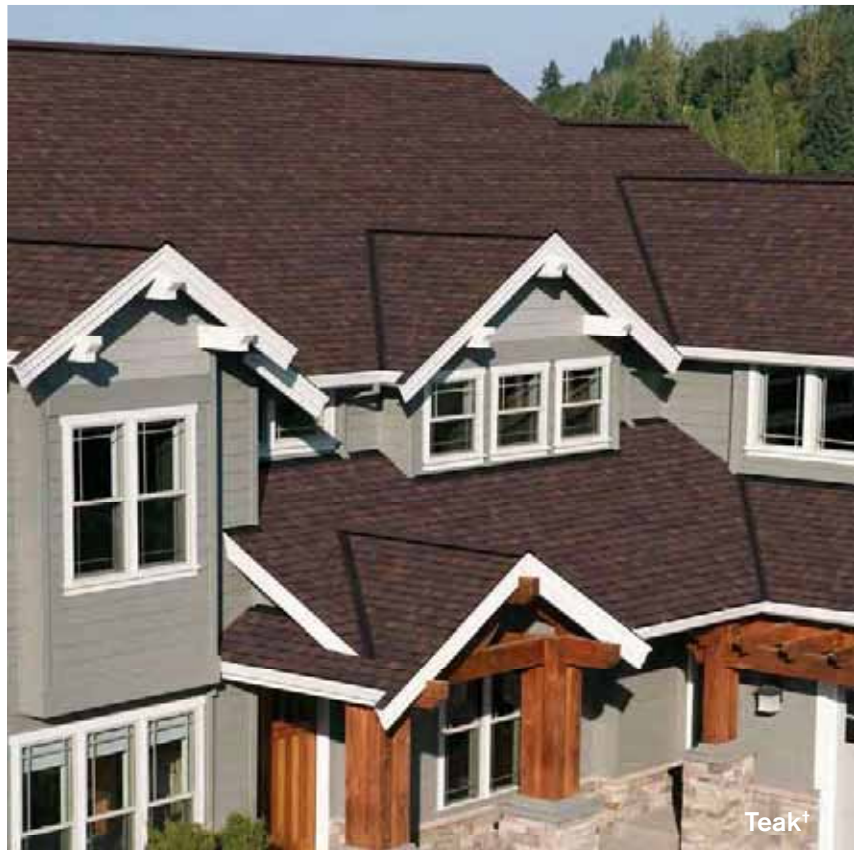

**Duration® Premium Shingles** with patented SureNail® Technology have it all — bold, thick, dimensional appearance with impressive durability. These beautiful and long-lasting shingles carry a Limited Lifetime Warranty\*\*/\*\*\* (for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty\* and an Algae Resistance Limited Warranty\* available on a regional basis. Duration® Premium Shingles are produced with StreakGuard™ Protection<sup>1</sup> to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty\*.

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\*  
(for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years



Algae Resistance available in areas shown in white.


**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- Florida Product Approval
- ICC-ES AC438\*
- Miami-Dade County Product Approval\*
- UL ER2453-01\*\*
- UL ER2453-02\*\*

**Duration® Premium Shingles Product Specifications**

Nominal Size	13 1/4" x 39 3/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	4
Coverage per Square	98.4 sq. ft.

Colors available in Service Areas 13, 14.

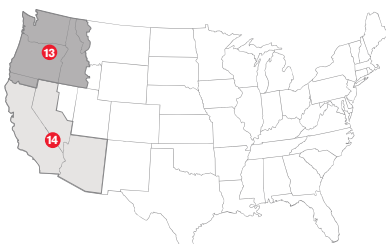

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

† Applies for all areas that recognize Miami-Dade product control section.

## Underwriters Laboratories Evaluation Service Evaluation Report.

1 StreakGuard™ Algae Resistance Technology is not available in the Compton (14) service area.







**TruDefinition® Oakridge® Shingles** feature the bold contrast and deep dimension of TruDefinition® color. They include a Limited Lifetime Warranty\*/\*\*\* (for as long as you own your home), a 110/130-MPH Wind Resistance Limited Warranty\*/\*†† and an Algae Resistance Limited Warranty\*. TruDefinition® Oakridge® Shingles are produced with StreakGuard™ Protection to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty.\*

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

110/130 MPH††

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years



**TruDefinition® Oakridge® Shingles Product Specifications**

Nominal Size	13 1/4" x 39 3/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.

**Applicable Standards and Codes**

- ASTM D228
- ASTM D3018 (Type 1)
- ASTM D3161 (Class F Wind Resistance)
- ASTM D3462
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- Florida Product Approval<sup>§</sup>
- ICC-ES AC438<sup>#</sup>
- Miami-Dade County Product Approval<sup>§§</sup>
- UL ER2453-01\*\*
- UL ER2453-02\*\*

Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).


TruDefinition® Oakridge® Regional Colors (See Map)



**Chateau Green†**  
Not available in Service Areas 2, 3, 6, 10, 11.



**Peppermill Gray†**  
Not available in Service Area 3, 8, 10, 11.



**Shasta White†**  
Not available in Service Areas 2, 6, 10, 11.



**Teak†**  
Not available in Service Areas 2, 3, 6.



**Twilight Black†**  
Not available in Service Areas 3, 8, 10, 11.



**Williamsburg Gray†**  
Not available in Service Areas 3, 8, 10, 11.

TruDefinition® Oakridge® National Colors



**Brownwood†**




**Desert Tan†**



**Driftwood†**




**Estate Gray†**



**Onyx Black†**

Color availability varies by Service Area.



- § Applicable only in Service Area 3.
- §§ Applies for all areas that recognize Miami-Dade Product Control Section.
- †† 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application and Owens Corning® Starter Shingle product application in eaves and rakes in accordance with installation instructions.
- # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.
- ## Underwriters Laboratories Evaluation Service Evaluation Report.



Driftwood<sup>†</sup>

**Oakridge® Shingles** are designed to provide long-lasting performance and striking beauty. In addition to a wide range of inviting, popular colors, they also offer a Limited Lifetime Warranty<sup>\*/\*\*\*</sup> (for as long as you own your home), a 110/130-MPH<sup>††</sup> Wind Resistance Limited Warranty\* and an Algae Resistance Limited Warranty\* available on a regional basis. Oakridge® Shingles are produced with StreakGuard™ Protection<sup>1</sup> to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty.\*

Oakridge® Regional Colors (See Map)



Amber<sup>†</sup>  
Not available in Service Areas 1, 2, 3, 4, 5, 6, 7, 8, 9, 11, 13.




Antique Silver<sup>†</sup>  
Not available in Service Areas 1, 2, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14.



Beachwood Sand<sup>†</sup>  
Not available in Service Areas 1, 2, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14.



Chateau Green<sup>†</sup>  
Not available in Service Areas 1, 2, 3, 6, 8, 12, 13, 14.



Shasta White<sup>†</sup>  
Not available in Service Areas 2, 3, 6, 8.



Sierra Gray<sup>†</sup>  
Not available in Service Areas 2, 3, 6, 8, 11.

Oakridge® National Colors



Brownwood<sup>†</sup>



Desert Tan<sup>†</sup>



Driftwood<sup>†</sup>



Estate Gray<sup>†</sup>



Onyx Black<sup>†</sup>



Teak<sup>†</sup>  
Not available in Service Areas 1, 3.



Williamsburg Gray<sup>†</sup>  
Not available in Service Areas 1, 3, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14.

**Oakridge® Shingles** are specially designed to provide a unique blend of artistry and craftsmanship that will give your home a look that is anything but ordinary. Blacks and grays are rich and warm, earth tones capture the vibrancy of nature's brightest hues, and bold color combinations help enhance a wide variety of exterior accents and landscaping.




Flagstone†



**Aged Cedar†**  
Not available in Service Areas 2, 3, 6, 8, 14.



**Black Walnut†**  
Not available in Service Areas 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 14.



**Flagstone†**  
Not available in Service Areas 2, 3, 8, 14.



**Peppermill Gray†**  
Not available in Service Area 2, 3, 6, 8, 14.



**Sand Castle†**  
Not available in Service Areas 2, 3, 6, 8, 12, 13.



**Twilight Black†**  
Not available in Service Areas 2, 3, 6, 8, 12, 13, 14.

**Product Attributes**

**Warranty Length\***

Limited Lifetime\*\*  
(for as long as you own your home)

**Wind Resistance Limited Warranty\***

110/130 MPH††

**Algae Resistance Limited Warranty\***

10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**Oakridge® Shingles Product Specifications**

Nominal Size	13 1/4" x 39 3/8"
Exposure	5 5/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.




Algae Resistance available in areas shown in white.

**Applicable Standards and Codes**

- ASTM D228
  - ASTM D3018 (Type 1)
  - ASTM D3161 (Class F Wind Resistance)
  - ASTM D3462
  - ASTM D7158 (Class H Wind Resistance)
  - ASTM E108/UL 790 (Class A Fire Resistance)
  - Florida Product Approval§
  - ICC-ES AC438#
  - Miami-Dade County Product Approval§§
  - UL ER2453-01\*\*
  - UL ER2453-02\*\*
- Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

Colors availability varies by Service Area.

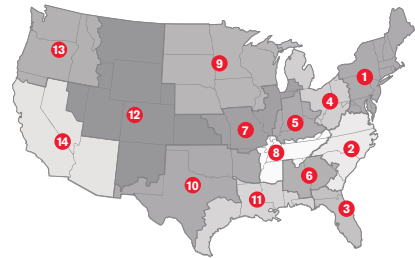

†† 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application and Owens Corning® Starter Shingle product application in eaves and rakes in accordance with installation instructions.

§ Applicable only in Service Area 3.

§§ Applies for all areas that recognize Miami-Dade Product Control Section.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

1 StreakGuard™ Algae Resistance Technology is not available in the Compton and Denver (12 and 14) service areas.



Three-tab shingles offer a solid value with curb appeal and lasting durability. Constructed of durable weathering-grade asphalt and a tough Fiberglas™ mat core, **Supreme® Shingles** come with a 25-Year Limited Warranty,\* a 60-MPH Wind Resistance Limited Warranty\* and an Algae Resistance Limited Warranty\* available on a regional basis. Supreme® Shingles are produced with StreakGuard™ Protection<sup>1</sup> to inhibit the growth of airborne blue-green algae\* that can cause unsightly dark streaks on your roof. Owens Corning provides a 10-year Algae Resistance Limited Warranty.\*

Supreme® National Colors



Aspen Gray†



Autumn Brown†




Brownwood†




Desert Tan†/##



Estate Gray†/##



Onyx Black†



Shasta White†

**Supreme® Regional Colors (See Map)**



**Amber†**  
Not available in Service Areas 1, 2, 3, 4, 5, 6, 7, 8, 9, 13.



**Antique Silver†**  
Not available in Service Areas 1, 2, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14.



**Beachwood Sand†**  
Not available in Service Areas 1, 2, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14.



**Chateau Green†**  
Not available in Service Areas 10, 11, 12, 13, 14.



**Driftwood†††**  
Not available in Service Area 14.



**Forest Green†**  
Not available in Service Areas 1, 2, 3, 4, 5, 6, 7, 8, 9, 12, 13, 14.



**Spanish Red†**  
Not available in Service Areas 1, 2, 3, 4, 5, 6, 7, 8, 9, 12, 13, 14.



**Teak†**  
Not available in Service Areas 1, 2, 3, 9, 12, 13, 14.



**Weathered Wood†**  
Not available in Service Areas 1, 4, 9, 12, 13, 14.



**Williamsburg Gray†**  
Not available in Service Areas 1, 3, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14.

**Product Attributes**

**Warranty Length\***  
25-Year Limited

**Wind Resistance Limited Warranty\***  
60 MPH

**Algae Resistance Limited Warranty\***  
10 Years

**TRU PROtection® Non-Prorated Limited Warranty\* Period**  
5 Years



Algae Resistance available in areas shown in white.


**Supreme® Shingles Product Specifications**

	IMPERIAL	METRIC††
Nominal Size	12" x 36"	13¼" x 39¾"
Exposure	5"	5⅝"
Shingles per Square	80	65
Bundles per Square	3	3
Coverage per Square	100 sq. ft.	99.98 sq. ft.

**Applicable Standards and Codes**

- ASTM D228
  - ASTM D3018 (Type 1)
  - ASTM D3161 (Class F Wind Resistance)
  - ASTM D3462
  - ASTM D7158 (Class H Wind Resistance)
  - ASTM E108/UL 790 (Class A Fire Resistance)
  - Florida Product Approval<sup>§</sup>
  - ICC-ES AC438<sup>#</sup>
  - Miami-Dade County Product Approval<sup>†</sup>
  - UL ER2453-01<sup>##</sup>
  - UL ER2453-02<sup>##</sup>
- Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

Color availability varies by Service Area.

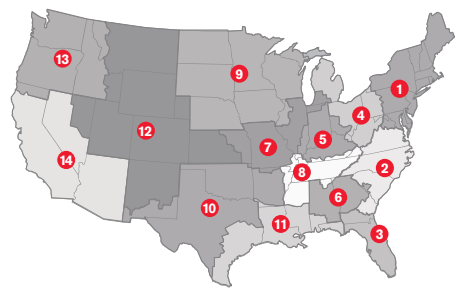

†† Available in Algae Resistance in Service Area 13 (see map).  
 ††† Available only in Service Areas 13 and 14 (see map).  
 § Applicable only in Service Area 3 (see map).  
 ‡ Applies for all areas that recognize Miami-Dade Product Control Section.  
 # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.  
 ## Underwriters Laboratories Evaluation Service Evaluation Report.  
 1 StreakGuard™ Algae Resistance Technology is not available in the Compton, Portland and Denver (12, 13 and 14) service areas.



# Total Protection Roofing System<sup>® ^</sup>

## TOTAL PROTECTION SIMPLIFIED™



Owens Corning® Total Protection Roofing System<sup>® ^</sup> integrates engineered Owens Corning® components that work together to address these three primary performance areas, critical to a high-performance roof, while also making it easy to understand the importance of each. **With Owens Corning, it's easy to confidently deliver total protection, beauty and peace of mind.**



### SEAL.

#### HELPS CREATE A WATER-PROOF BARRIER

- Ice & Water Barrier
- Synthetic Underlayment



### DEFEND.

#### HELPS PROTECT AGAINST NATURE'S ELEMENTS

- Starter Shingles
- Shingles
- Hip & Ridge Shingles



### BREATHE.

#### FOR BALANCED ATTIC VENTILATION

- Intake Vents
- Exhaust Vents

### + COMFORT.

Add comfort and energy performance with proper attic insulation.



<sup>^</sup> Excludes non-Owens Corning® roofing products such as flashing, fasteners, pipe boots and wood decking.

# TOTAL PROTECTION. TOTAL CONFIDENCE.™

## SEAL.



### Ice & Water Barrier

WeatherLock<sup>®</sup>, Titanium<sup>®</sup> PSU30 and RhinoRoof<sup>®</sup> Self-Adhered Ice & Water Barrier products are designed to protect the roof where water has a tendency to collect or flow, including valleys, vents, chimneys and skylights. Ice & water barrier products also help prevent damage from ice damming, when melting and refreezing water can migrate beneath the shingles and lead to premature roof deterioration.



### Synthetic Underlayment

Synthetic Underlayment provides a secondary barrier between the wood decking and shingles. Designed to help protect against wind-driven rain that can get beneath the shingle.

Owens Corning<sup>®</sup> synthetic underlayment products include RhinoRoof<sup>®</sup> U20, ProArmor<sup>®</sup>, Deck Defense<sup>®</sup>, Titanium<sup>®</sup> UDL25, Titanium<sup>®</sup> UDL30 and Titanium<sup>®</sup> UDL50 Synthetic Underlayment.

Owens Corning also offers Fiberglas<sup>®</sup> Reinforced Felt Underlayment.

## BREATHE.



### Intake ventilation

When used with the proper exhaust ventilation, Owens Corning<sup>®</sup> VentSure<sup>®</sup> InFlow<sup>®</sup> Vent helps replace the warm, humid air in your attic with cool, dry air to help protect the interior components of your roof system from heat and moisture damage. They also help keep the attic temperature closer to the outside temperature to help eliminate problems such as ice damming and premature shingle deterioration.



### Exhaust ventilation

Owens Corning<sup>®</sup> exhaust ventilation components such as VentSure<sup>®</sup> ridge or off-ridge vents help draw air out of the attic, protecting the roofing system from heat and moisture damage. Optimally designed to work together with our VentSure<sup>®</sup> intake ventilation, they help create a balanced flow where warm, humid air is continuously replaced by cool, dry air.

## DEFEND.



### Starter Shingle Products

Owens Corning<sup>®</sup> Starter Shingle products are the first step in the proper installation of the shingles. They help provide a clean look with a straight edge at the eave and along the rake edge of the roof. The continuous sealant bead on the product provides a seal between the starter and the first row of shingles. Owens Corning<sup>®</sup> Starter Shingle products help prevent shingle blow-offs and water infiltration in a vulnerable area of the roof.



### Shingles

Shingles not only serve as the first layer of defense against the forces of nature, they also help define the character of your home. With innovations such as our patented SureNail<sup>®</sup> Technology and the multiple granule colors and shadowing used in our TruDefinition<sup>®</sup> Duration<sup>®</sup> Shingles, Owens Corning<sup>®</sup> shingles are designed to bring strength and beauty to your roof.



### Hip & Ridge Shingles

Owens Corning offers a variety of styles designed to match and complement our shingles, from the bold look of DecoRidge<sup>®</sup>††, to the patented performance of SureNail<sup>®</sup> Technology on DuraRidge<sup>®</sup>††, to the clean, smooth lines of our ProEdge<sup>®</sup> Series.††

## The most important part of the roof? All of them.

It takes more than just shingles to protect a home. It takes an integrated system of components and layers. The Owens Corning<sup>®</sup> Total Protection Roofing System<sup>® ^</sup> gives you the assurance that all of your Owens Corning<sup>®</sup> roofing components are working together to help increase the performance of your roof. Ask your contractor to install a Total Protection Roofing System<sup>® ^</sup>.

†† Available regionally; visit [www.owenscorning.com/roofing](http://www.owenscorning.com/roofing) for details.



# SEAL. HELPS CREATE A WATER-PROOF BARRIER



Rot      Mold

The final line of defense between the home and the elements. Ice & water barriers and underlayment products help block water from the roof deck and out of the home to help prevent rot, mold and water damage.

## SELF-ADHERED ICE & WATER BARRIER PRODUCTS



### WEATHERLOCK® G GRANULATED SELF-SEALING ICE & WATER BARRIER

- Excellent tear resistance to help avoid cracking and breaking during installation



### WEATHERLOCK® MAT MAT-FACED SELF-SEALING ICE & WATER BARRIER

- Patented SureStep® surface reduces slipping, sticking and scuffing



### WEATHERLOCK® FLEX FLEXIBLE SELF-SEALING ICE & WATER BARRIER†

- Flexible solution for multiple applications, including eaves, rakes, valleys, vents, chimneys and skylights



### WEATHERLOCK® SPECIALTY TILE AND METAL SELF-SEALING ICE & WATER BARRIER†

- Single-layer polyester walking surface provides a slip-resistant work area
- Excellent surface for foam adhesive set and mechanically fastened roof tile application



### TITANIUM® PSU30

- Specially designed to provide protection against water infiltration around eaves, rakes, valley, vents, chimneys and skylights



### RHINOROOF® GRANULATED

- Excellent adhesion even at cold temperatures

## SYNTHETIC UNDERLAYMENT PRODUCTS



### DECK DEFENSE® HIGH-PERFORMANCE ROOF UNDERLAYMENT

- Durable synthetic construction with unique bottom surface coating that resists tearing
- Extended exposure for up to 6 months†



### PROARMOR® SYNTHETIC ROOF UNDERLAYMENT

- Utilizes slip resistant Fusion Back Coating Technology™ to provide excellent grip to a roof deck which lends to a stable walking surface



### TITANIUM® SYNTHETIC ROOFING UNDERLAYMENT

- Patented Sure-Foot® nodular walking surface
- Highly engineered, mechanically attached
- Available in UDL25, UDL30, and UDL50



### RHINOROOF® U20 SYNTHETIC ROOFING UNDERLAYMENT

- Fiber grip walking surface
- Durable high strength design



### FIBERGLAS™ REINFORCED FELT UNDERLAYMENT

- Reinforced with Fiberglas™ to support flatter, more uniform shingle applications
- Coverage of 400 sq. ft. per roll





# DEFEND. HELPS PROTECT AGAINST NATURE'S ELEMENTS



Blow Off Impact

Owens Corning® shingles combine ultimate strength with artistry and craftsmanship. They form the tough yet beautiful shell, with strong adhesion that helps resist blow-offs and helps shed water away from the roof deck.

## STARTER SHINGLE PRODUCTS



### STARTER STRIP PLUS SHINGLES†

- Extra-wide starter can be used with any shingle that has an exposure of up to 6"



### STARTER STRIP SHINGLES‡

- Compatible with any shingle with an exposure of up to 6"



### STARTER SHINGLE ROLL†

- Easy peel-and-stick application

## SHINGLES



Architectural

### TRUDEFINITION® DURATION® WITH SURENAIL® TECHNOLOGY

- Bold, lively contrast with complementary shadow lines and dimension
- Exceptional wind resistance that delivers 130-MPH\* wind warranty performance with only four nails



Specialty



3-tab

### STYLES FOR EVERY HOME

- Wide selection of specialty, architectural and 3-tab shingles

## HIP & RIDGE SHINGLES



### DECORIDGE® HIP & RIDGE†

- Thick bull-nosed design offers a refined look
- Durable construction – heavyweight laminate construction with SBS-modified asphalt
- 8" exposure



### DURARIDGE® HIP & RIDGE†

- The first hip and ridge shingle with the strength of patented SureNail® Technology
- High-profile and layered design that enhances the roof line
- 8" exposure



### RIZERIDGE® HIP & RIDGE†

- Foldable design adds depth & dimension
- TruBond® Sealant provides excellent wind performance
- 6" exposure



### PROEDGE® HIP & RIDGE†

- Shadow line allows for distinction along the ridgeline
- Manufactured perforations and a larger exposure offer easy installation
- 6" exposure

### OTHER SPECIALTY HIP & RIDGE SHINGLES

- Berkshire® Hip & Ridge Shingles
- WeatherGuard® HP Hip & Ridge Shingles
- ProEdge Storm® Hip & Ridge Shingles

† Available regionally; visit [www.owenscorning.com/roofing](http://www.owenscorning.com/roofing) for details.

\* See actual warranty for complete details, limitations and requirements.

‡ Special application required for extended exposure. See installation instructions.



# BREATHE.

## FOR BALANCED ATTIC VENTILATION



Mold

Ice Damming

Heat Buildup

Intake and exhaust vents help optimize air flow through the attic to manage temperature and moisture, that can lead to ice damming, roof deterioration, premature roof aging and mold infestation.

### INTAKE VENTILATION PRODUCTS

#### VENTSURE® INFLOW® VENT



- Versatile design for soffitless, open-soffit and traditional roofs
- Excellent protection against wind-driven rain
- Clean, smooth profile
- Net free vent area per lineal ft.: 10 sq. inches

#### RAFT-R-MATE® ATTIC RAFTER VENTS



- Assists in the constant flow of fresh air from soffit vent to attic
- Extruded polystyrene construction
- Fits 24" rafters or snap in half for 16" or 12" rafter spacing

Net free vent area:  
22.3 sq. inches

### EXHAUST VENTILATION PRODUCTS

#### VENTSURE® 4-FOOT STRIP HEAT & MOISTURE RIDGE VENT



- Flat baffle, corrugated ridgeline for ultimate performance
- Easy to handle 4' sections
- Regionally available in three different widths to accommodate enhanced cap shingles
- Available with an optional WeatherPROtector® Moisture Barrier
- Net free vent area per lineal ft.: 18 sq. inches for 8" & 10" product  
20 sq. inches for 12" product

#### VENTSURE® RIGID ROLL



- Easy-to-handle 20' rolls; end caps are provided with each roll
- Regional availability in three different widths to accommodate enhanced cap shingles
- Net free vent area: 250 sq. inches per roll (12.5 sq. inches per lineal ft.)

EXHAUST VENTILATION PRODUCTS

**VENTSURE® RIDGECAT®  
ROLLED RIDGE VENT**



- Lightweight, entangled-net structure for long lasting ventilation performance
- Breathable UV edge filter helps prevent water, dust and insect infiltration
- Low profile, straight edge for a sleek, finished look
- Net free vent area: 300 sq. inches per roll (15 sq. inches per lineal ft.)

**VENTSURE® SKY RUNNER LTE®  
ROLLED RIDGE VENT†**



- Internal baffle design
- Staggered, flat external baffle
- Net free vent area: 360 sq. inches per roll (12 sq. inches per lineal ft.)

**VENTSURE® PLASTIC  
SLANT BACK ROOF VENT  
WITH SCREEN**



- Suitable for up to 12:12 pitch
- Durable polypropylene construction
- Protects against rodents and birds
- Colors: Black, W. Wood,
- 16.5 x 19.5 base; 9" opening
- Net free vent area: 61 sq. inches

**VENTSURE® METAL SLANT  
BACK ROOF VENT WITH  
EXTERIOR LOUVER**


























- Suitable for up to 12:12 pitch
- Aluminum and steel construction
- Colors: Black, Brown, W. Wood
- Net free vent area: 50 sq. inches

**VENTSURE® LOW-PROFILE  
SLANT BACK VENT WITH  
EXTERIOR LOUVER†**



- Low profile for enhanced aesthetics
- Available with 36" x 28" extended flange
- Galvanized steel construction
- Colors: Black, Brown, Dark Gray, Light Gray, Mill, White
- Net free vent area: 72 sq. inches

† Available regionally; visit [www.owenscorning.com/roofing](http://www.owenscorning.com/roofing) for details.

Owens Corning® Shingle Collection	Shingle Construction	Shingle Construction and Description	Patented SureNail® Technology	Warranty Length*	Wind Resistance Limited Warranty*	Algae Resistance Limited Warranty*	TRU PROTECTION® Non-Prorated Limited Warranty* Period	Nominal Size
<b>Berkshire®</b> Collection		Laminated, natural slate appearance		Limited Lifetime**	130 MPH	15 Years	10 Years	18¾" x 38"
<b>Woodmoor®</b> Collection		Laminated, extra thick, rustic wood shake appearance		Limited Lifetime**	110/130 <sup>S</sup> MPH	10 Years	10 Years	14¼" x 40"
<b>Woodcrest®</b> Collection		Laminated, thick, rustic wood shake appearance		Limited Lifetime**	110/130 <sup>S</sup> MPH	10 Years	10 Years	14¼" x 40"
TruDefinition® <b>WeatherGuard® HP</b>		Laminated, dimensional appearance, bold contrast, impact resistance		Limited Lifetime**	110/130 <sup>###</sup> MPH	10 Years	10 Years	13¼" x 39⅜"
TruDefinition® <b>DURATION MAX®</b>		Laminated, thick shingle appearance, bold contrast		Limited Lifetime**	130 MPH		10 Years	13¼" x 39⅜"
<b>DURATION®</b> Premium Cool 		Laminated, dimensional appearance, energy efficient		Limited Lifetime**	130 MPH	10 Years	10 Years	13¼" x 39⅜"
TruDefinition® <b>DURATION® COOL</b> 		Laminated, dimensional appearance, energy efficient		Limited Lifetime**	130 MPH	10 Years	10 Years	13¼" x 39⅜"
TruDefinition® <b>DURATION STORM®</b>		Laminated, dimensional appearance, bold contrast, impact resistance		Limited Lifetime**	130 MPH	10 Years	10 Years	13¼" x 39⅜"
TruDefinition® <b>DURATION® Designer</b> Colors Collection		Laminated, dimensional appearance, bold contrast, unique vibrant colors		Limited Lifetime**	130 MPH	10 Years <sup>##</sup>	10 Years	13¼" x 39⅜"
TruDefinition® <b>DURATION®</b>		Laminated, dimensional appearance, bold contrast		Limited Lifetime**	130 MPH	10 Years <sup>##</sup>	10 Years	13¼" x 39⅜"
<b>DURATION®</b> Premium		Laminated, dimensional appearance		Limited Lifetime**	130 MPH	10 Years	10 Years	13¼" x 39⅜"
TruDefinition® <b>Oakridge®</b>		Laminated, dimensional appearance, bold contrast		Limited Lifetime**	110/130 <sup>###</sup> MPH	10 Years	10 Years	13¼" x 39⅜"
<b>Oakridge®</b>		Laminated, dimensional appearance		Limited Lifetime**	110/130 <sup>###</sup> MPH	10 Years <sup>##</sup>	10 Years	13¼" x 39⅜"
<b>Supreme® / Supreme® Metric</b>		Single layer, three-tab appearance		25-Year Limited*	60 MPH	10 Years <sup>##</sup>	5 Years	12" x 36" 13¼" x 39⅜"

\* See actual warranty for complete details, limitations and requirements.

\*\* 40-Year Limited Warranty on commercial projects.

‡ Only on product sold in Canada.

†† Applies for all areas that recognize Miami-Dade Product Control Section.

‡‡ Algae Resistance available on a regional basis. Shingles are algae resistant to help control the growth of algae and discoloration.

Exposure	Shingles per Square	Bundles per Square	Coverage per Square	ASTM D228	ASTM D3018 (Type 1)	ASTM D3161 (Class F Wind Resistance)	ASTM D3462	ASTM D7158 (Class H Wind Resistance)	ASTM E108/JUL 790 (Class A Fire Resistance)	CSA A123.5*	Florida Product Approval	ICC-ES AC438#	Miami-Dade County Product Approval**	UL 2218 (Class 4 Impact Resistance)	UL ER2453-01##	UL ER2453-02##	Cool Roofing Rating Council	ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRRC).	Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRRC).
8 <sup>3</sup> / <sub>8</sub> "	45	5	99.5 sq. ft.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓			
4"	90	6	100 sq. ft.	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓		
4"	90	6	100 sq. ft.	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓		
5 <sup>5</sup> / <sub>8</sub> "	64	3	98.4 sq. ft.	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓			
5 <sup>5</sup> / <sub>8</sub> "	64	4	98.4 sq. ft.	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓		
5 <sup>5</sup> / <sub>8</sub> "	64	4	98.4 sq. ft.	✓	✓	✓	✓	✓	✓		✓	✓			✓	✓	✓	✓	
5 <sup>5</sup> / <sub>8</sub> "	64	3	98.4 sq. ft.	✓	✓	✓	✓	✓	✓			✓			✓	✓	✓		
5 <sup>5</sup> / <sub>8</sub> "	64	3	98.4 sq. ft.	✓	✓	✓	✓	✓	✓	✓		✓		✓	✓	✓			
5 <sup>5</sup> / <sub>8</sub> "	64	3	98.4 sq. ft.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓ <sup>§§</sup>		✓
5 <sup>5</sup> / <sub>8</sub> "	64	4	98.4 sq. ft.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓			
5 <sup>5</sup> / <sub>8</sub> "	64	3	98.4 sq. ft.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓			
5 <sup>5</sup> / <sub>8</sub> "	64	3	98.4 sq. ft.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓ <sup>§§</sup>		✓
5" / 5 <sup>5</sup> / <sub>8</sub> "	80 / 65	3	100 sq. ft. / 99.98 sq. ft.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓ <sup>§§</sup>		✓

§ 130 MPH is applicable only with Owens Corning® Starter Shingle product application along eaves and rakes in accordance with installation instructions.

§§ Applicable to Shasta White color only on TruDefinition® Duration®, Oakridge® and Supreme® Shingles.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

### 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application and Owens Corning® Starter Shingle product application along eaves and rakes in accordance with installation instructions.




# Owens Corning Roofing Platinum and Preferred Contractors

Getting the job done right starts with choosing the right contractor.

Purchasing a new roof is one of the biggest decisions you'll ever make for your home. Fortunately, it's one you'll probably have to make only once or twice in your lifetime. That's why it's so important to make sure it's done right and that you'll have someone standing behind their work for years to come.

Owens Corning Roofing Platinum and Preferred Contractors are part of a network of roofing professionals selected specifically for their commitment to service, reliability and craftsmanship. They're also the only contractors authorized by Owens Corning Roofing to offer the added protection of our Roofing System Limited Warranties<sup>††</sup> (shown below). These warranties extend the standard coverage on many of our products and offer one-time transferability<sup>††</sup> — providing you with peace of mind even if you're planning to sell. Talk to your contractor about which warranties are available to you.

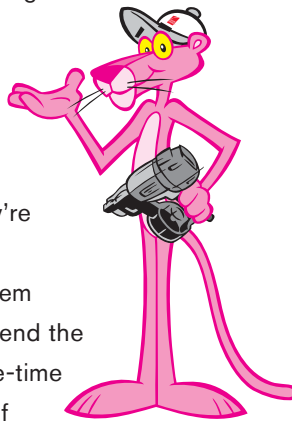

	Standard Product Limited Warranty* Coverage		System Protection Roofing Limited Warranty* Coverage		Preferred Protection Roofing System Limited Warranty* Coverage		Platinum Protection Roofing System Limited Warranty* Coverage	
Shingles	TRU PROtection* Period	Warranty*	TRU PROtection* Period	Workmanship	TRU PROtection* Period	Workmanship†	TRU PROtection* Period	Workmanship^
Laminate**	10 Years	Lifetime*	50 Years	N/A	50 Years	10 Years	50 Years	Lifetime^
Supreme®	5 Years	25 Years	15 Years	N/A	15 Years	10 Years	15 Years	15 Years

To find an Owens Corning Roofing Platinum and Preferred Contractor near you, check out our Contractor Locator at [owenscorning.com/roofing](http://owenscorning.com/roofing)

† Contractor is responsible for the first two years. See actual warranty for transferability details.  
 †† See actual warranty for complete details, limitations and requirements. Limited Lifetime warranty (for as long as the original homeowner owns their home).  
 ^ Lifetime workmanship applies to all shingles except Supreme® Shingles. Lifetime workmanship is only available to the original purchaser and is not fully transferable. See "transferability of the warranty" section for more details. Coverage is prorated after the first twenty five (25) years. Contractor is responsible for covering the first two years of workmanship.  
 \*\* Laminate shingles are: Berkshire®, Woodmoor®, Woodcrest®, TruDefinition® WeatherGuard® HP, TruDefinition® Duration®, TruDefinition® Duration STORM®, TruDefinition® Duration® Designer Colors Collection, TruDefinition® Duration MAX®, TruDefinition® Duration® COOL, Duration® Premium Cool, Duration® Premium, TruDefinition® Oakridge® and Oakridge® Shingles.  
 Owens Corning Roofing Platinum and Preferred Contractors are independent contractors and are not an affiliate of Owens Corning Roofing and Asphalt, LLC or its affiliated companies

For more information on Owens Corning® roofing products, or any of our wide range of building products and systems, it's easy to reach us:  
**1-800-GET-PINK® | [owenscorning.com/roofing](http://owenscorning.com/roofing)**



**OWENS CORNING ROOFING AND ASPHALT, LLC**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659  
**1-800-GET-PINK®**  
**[www.owenscorning.com/roofing](http://www.owenscorning.com/roofing)**



Pub. No. 10018857-I. Printed in U.S.A. May 2018.  
THE PINK PANTHER™ & © 1964–2018 Metro-Goldwyn-Mayer Studios Inc.  
All Rights Reserved. The color PINK is a registered trademark of Owens Corning.  
© 2018 Owens Corning. All Rights Reserved.

(Atlanta, Brookville, Denver, Houston, Irving, Jacksonville, Kearny, Medina, Memphis, Minneapolis, Portland, Savannah, Summit)

† Actual colors and granule blends may vary from the photo. We suggest that you view actual product on the roof to get a better idea of the finish color. Color availability subject to change without notice. Ask your professional roofing contractor for samples of colors available in your area.

\* See actual warranty for complete details, limitations and requirements.

\*\* 40-Year Limited Warranty on commercial projects.

^ Excludes non-Owens Corning® roofing products such as flashing, fasteners, pipe boots and wood decking.

ENERGY STAR and the ENERGY STAR mark are registered trademarks of the U.S. Environmental Protection Agency.

SureNail® Technology is proprietary with U.S. and foreign protection including U.S. Patent Nos. 6,471,812; 7,836,654; 8,156,704; 8,181,413; 8,240,102; 8,430,983; 8,607,521; 8,623,164; 8,752,351; 8,991,130; 9,121,178; and other patents pending.

SureNail® Technology is available only on Owens Corning® Duration® Series Shingles.

SureNail® Technology is not a guarantee of performance in all weather conditions.

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.